



Lighting Your Savings Lighting Your Success


Product Data Sheet

- Input voltage: 220-240V AC 50/60Hz
- External constant current LED driver included
- Housing & heatsink: plastic & aluminium
- Diffuser: Opal PC
- Faceplate: PBT
- Power factor: 0.9
- Tri-CCT (3000K/ 4000K/ 5700K) in one fitting
- CCT switch on driver
- LED chips: SMD2835
- CRI: ≥ 80
- Flex & plug: 600mm
- Ambient temperature: -20 to 400C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with sensor




Tested & Recommended Dimmers:

BRAND	PART NO.
CLA	VELA
CLIPSAL	32E450UDM, 31E2PUDM, 32ELEDM-WE, 32E450TM,
HPM	CAT250T, CAT400T
DIGINET	MEDM, MMDM/RT

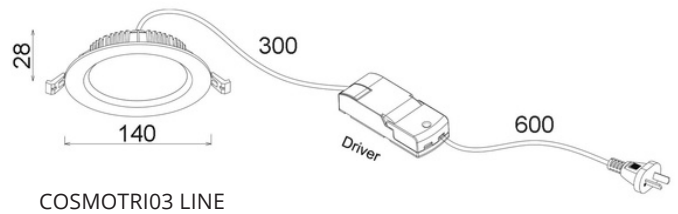

COSMOTRI03 LINE

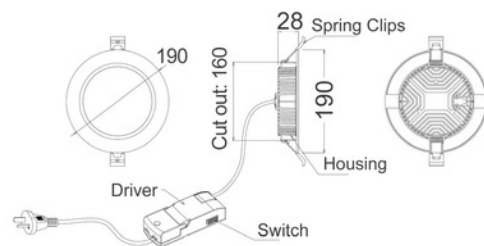

COSMOTRI04 LINE

Part No.	Lumens			Watt	CRI	Power Factor	Dimensions	Cut out
	3000K	4000K	5700K					
COSMOTRI03	1200LM	1350LM	1250LM	15W	≥ 80	0.9	Ø140x28mm	Ø120mm
COSMOTRI04	1800LM	2000LM	1900LM	20W	≥ 80	0.9	Ø190x28mm	Ø160mm
COSMOTRI05	2250LM	2500LM	2375LM	25W	≥ 80	0.9	Ø230x28mm	Ø195mm

